

# SUPER CAPACITOR

## SC2I2430-4.0F Brief Datasheet

### 1. BASIC SPECIFICATION:

Items		Characteristic		
		Standard	Test condition	
1.1	Rated capacity	4.0F	The lowest capacity when charge @10mA rated, discharge @ 10mA to cut-off voltage 0.1V	
1.2	Nominal voltage	5.5V		
1.3	Cut-off voltage	0.1V		
1.4	Equivalent Resistance in series	$\leq 15 \Omega$	Test by instrument of interior resistance (AC1kHz)	
1.5	Charge voltage	5.5 $\pm$ 0.05V		
1.6	Charge time	Rated charge	Approx.0.5 hour	Charge at 10mA
		Fast charge	Approx.0.2hour	Charge at 20mA
1.7	Max. charge current	400mA		
1.8	Max. discharge current	400mA	When charge to 5.5V	
1.9	Short cut current	Over 600mA	When charge to 5.5V	
1.10	Working temperature	charge	-25 - 70°C	
		Discharge	-25 - 70°C	
1.11	Storage temperature	-20 – +45°C		
1.12	Average Weight	6.7g $\pm$ 0.05g		
1.13	Max. Size (mm)	Thickness	Diameter	The precision of vernier caliper is less than 0.02mm
		6.7 <sub>-0.2</sub> <sup>+0</sup>	24.8 <sub>-0.5</sub> <sup>+0</sup>	
1.14	Appearance	There is no defect in the surface, such as crack, change color, leaking or transfiguration		See by naked eyes


Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.

## 2. WARNING!

\* Do not overcharge, force discharge, short-circuit, disassemble, deform, heat or place the capacitor near a direct flame. Any of the above actions could cause it to ignite, explode or become damaged.

- Keep this capacitor out of the reach of children.

## 3. DIMENSION

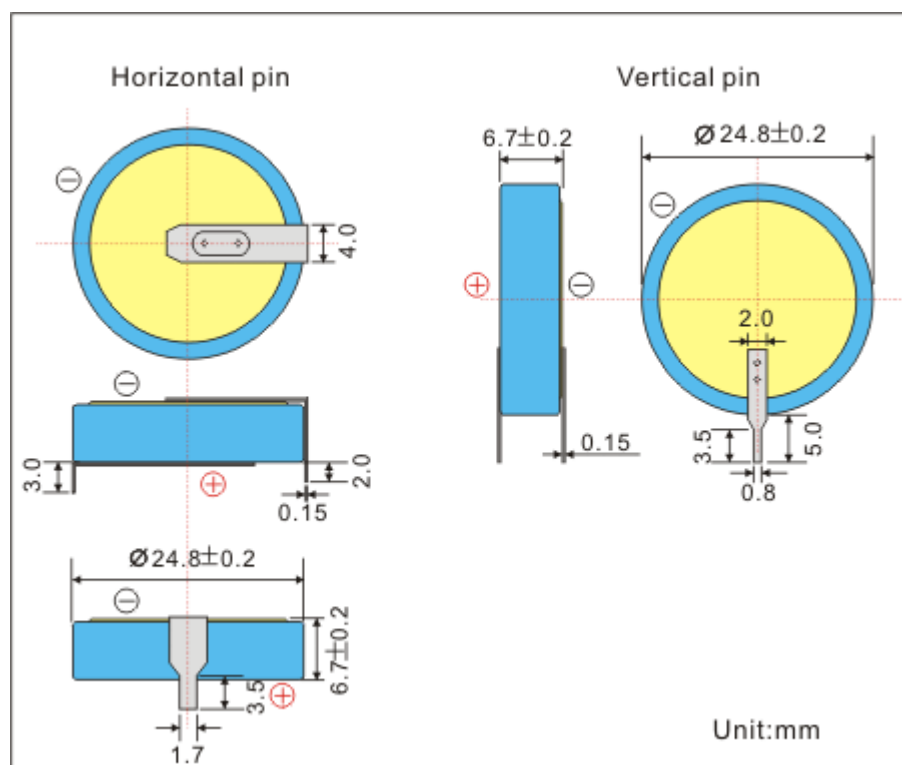

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.