

# SUPER CAPACITOR

## SC621-0.3F Brief Datasheet

### 1. BASIC SPECIFICATION:

Items		Characteristic	
		Standard	Test condition
1.1	Rated capacity	0.3F	The lowest capacity when charge @1mA rated, discharge @ 1mA to cut-off voltage 0.1V
1.2	Nominal voltage	2.7V	
1.3	Cut-off voltage	0.1V	
1.4	Equivalent Resistance in series	$\leq 70 \Omega$	Test by instrument of interior resistance (AC1kHz)
1.5	Charge voltage	2.7 $\pm$ 0.05V	
1.6	Max. charge current	20mA	
1.7	Max. discharge current	20mA	When charge to 2.7V
1.8	Short cut current	Over 40mA	When charge to 2.7V
1.9	Working temperature	charge	-25 - 70°C
		Discharge	-25 - 70°C
1.10	Storage temperature	-20 – +45°C	
1.11	Average Weight	0.5g $\pm$ 0.05g	
1.12	Max. Size (mm)	Thickness	Diameter
		2.5 $_{-0.2}^{+0}$	7.1 $_{-0.05}^{+0}$
1.13	Appearance	There is no defect in the surface, such as crack, change color, leaking or transfiguration	
			The precision of vernier caliper is less than 0.02mm
			See by naked eyes


### 2. WARNING!

- \* Do not overcharge, force discharge, short-circuit, disassemble, deform, heat or place the capacitor near a direct flame. Any of the above actions could cause it to ignite, explode or become damaged.
- \* Keep this capacitor out of the reach of children.

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.

<http://eemb.com>      [global@eemb.com](mailto:global@eemb.com)

### 3. DIMENSION

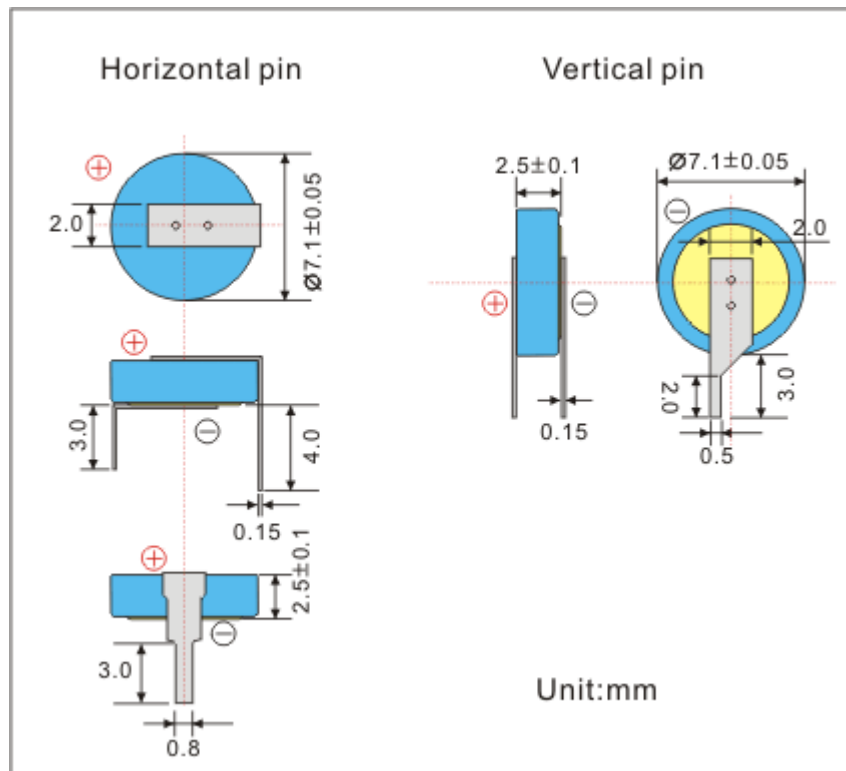

Note: Any representations in this brochure concerning performance, are for informational purposes only and are not construed as warranties either expressed or implied, of future performance.

<http://eemb.com>

[global@eemb.com](mailto:global@eemb.com)